



# 25W G24 LED Lamp Replacement for 4 Pin CFL Plug-in



- Built-in Surge Suppressors & Protection •
- Bright • High CRI • High Lumen Output •
- Suitable for Open & Enclosed Fixtures •
- Simple Installation • Rugged Design •
- High Power Factor • Self Ballasted •
  - Rated Life 50,000 Hours (\*) •
- G24 4-Pin Plug-in Universal Base •
- Fits G24d1-3, G24q1-3, GX24q1-4 •
- Available in Color Temp. 3000K, 4000K, 5500K •






Model	Product	Size	Power	Flux	Equivalent
CFL-25W12-30K-G24	25W G24 Cluster LED Bulb 3000K 360°	$\varnothing 2\frac{3}{4}''$ L 6 $\frac{3}{4}''$	26W Max.	4,100 Lumen	CFL42W/830 42W 4Pin CFL
CFL-25W12-40K-G24	25W G24 Cluster LED Bulb 4000K 360°		26W Max.	4,300 Lumen	CFL42W/841 42W 4Pin CFL
CFL-25W12-55K-G24	25W G24 Cluster LED Bulb 5500K 360°	$\varnothing 70\text{mm}$ L 150mm	26W Max.	4,300 Lumen	CFL42W/850 42W 4Pin CFL

- 120-277Vac ~50/60Hz • PF > 0.9 • G24 4-Pin Universal Lamp Base •
- ~165 lm/W • CRI ~80 • CCT 3000K (30K) 4000K (40K) 5500K (55K) ±10% •
- (\*) Rated Life 50,000 Hrs. (L<sub>70</sub> B<sub>50</sub>) at T<sub>[A]</sub> 25°C Max. •



# 25W G24 LED 4 Pin CFL Plug-in

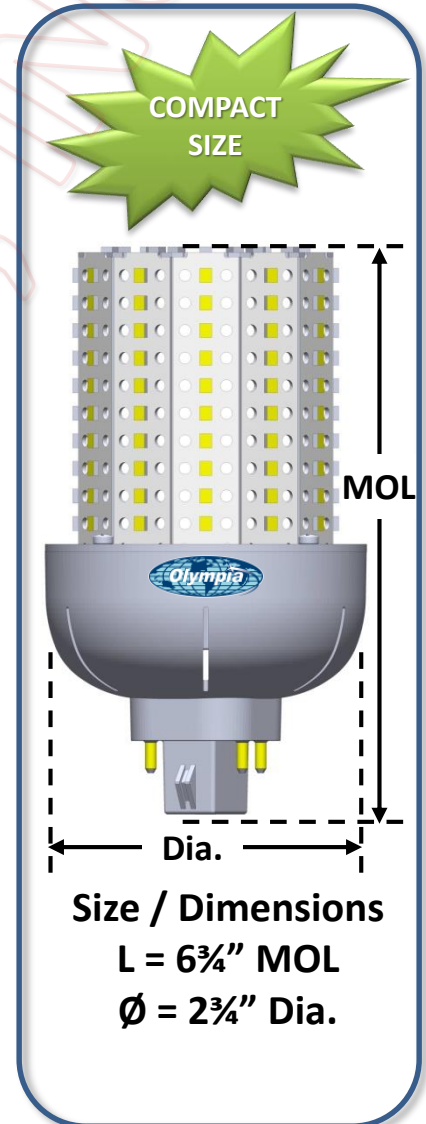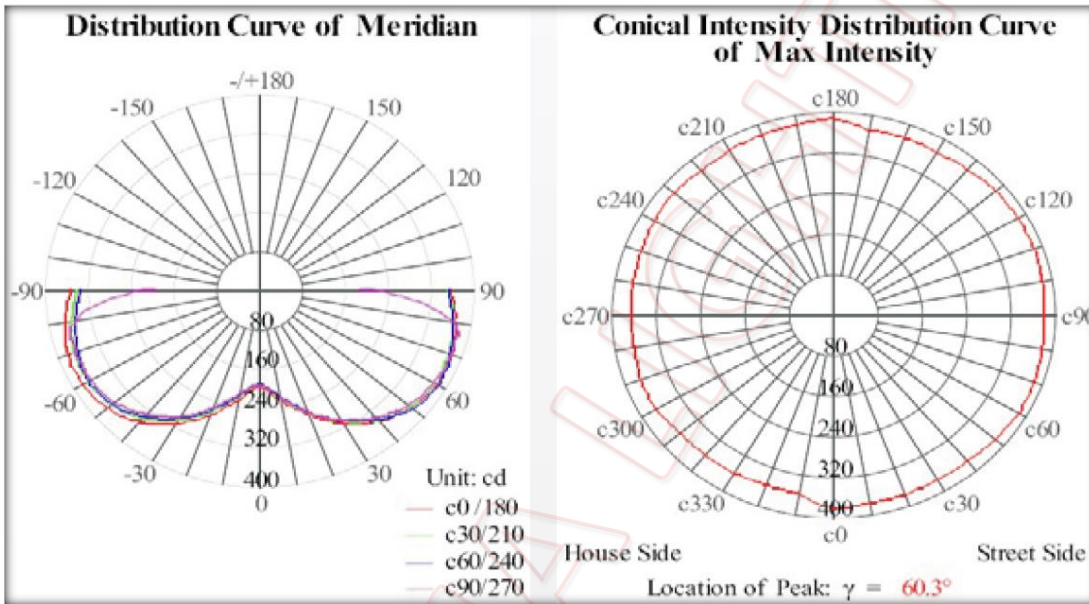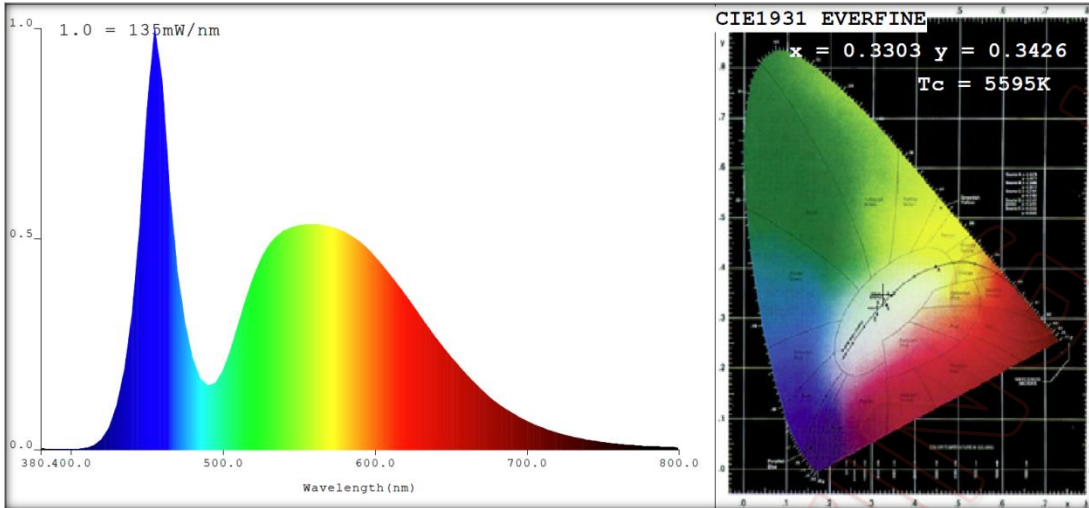

Model	Product	Power	Equivalent
CFL-25W12-xxK-G24	Cluster LED Bulb	26W	150W MH/HPS
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	26W Max. P.F. ≈ 0.97	~165 lm/W	4,300 Lumen (CW) 4,100 Lumen (WW)
Color Rendering	Color Temperature	Beam Angle	Life
CRI ÷ 75~80	30K ÷ CCT 3,000K ±10% 55K ÷ CCT 5,500K ±10%	360°	5-Years / 50,000 Hours (L <sub>70</sub> B <sub>50</sub> ) T <sub>[A]</sub> 25°C Max.