



150W LED Shoebox Fixture

Outdoor Pole/Arm-Mounted Area and Roadway Luminaire

- 5-Years | 50,000 Hours Warranty (*) •
- High CRI • High Lumen Output •
- High Power Factor • Low THD •
- Built-in Surge Protection •



US Patent D834,737S







Model	Product		Power	Flux	Equivalent
SBL-150W-50K-277V	LED Shoebox Luminaire 150W 5000K 277V	L: 21¼" W: 11" H: 5¼"	150W	22,500 lm	750W MH
SBL-150W-55K-480V	LED Shoebox Luminaire 150W 5500K 480V	L: 54cm W: 28cm H: 13cm			

- "277V" 120-277Vac || "480V" 208-480Vac ~50/60Hz • P.F. > 0.9 • THD < 20% • Terminal Block •
- Color Temp. (CCT) 5500K ±10% • 150 Lumen per Watt • CRI ≈ 80 •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_[A] 25°C Max. •



150W LED Shoebox Fixture

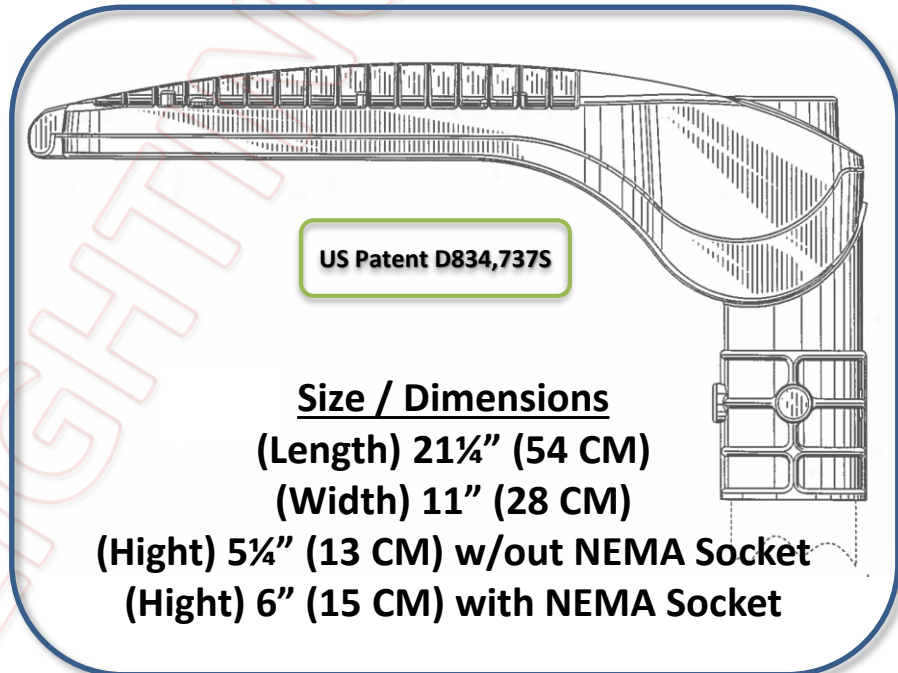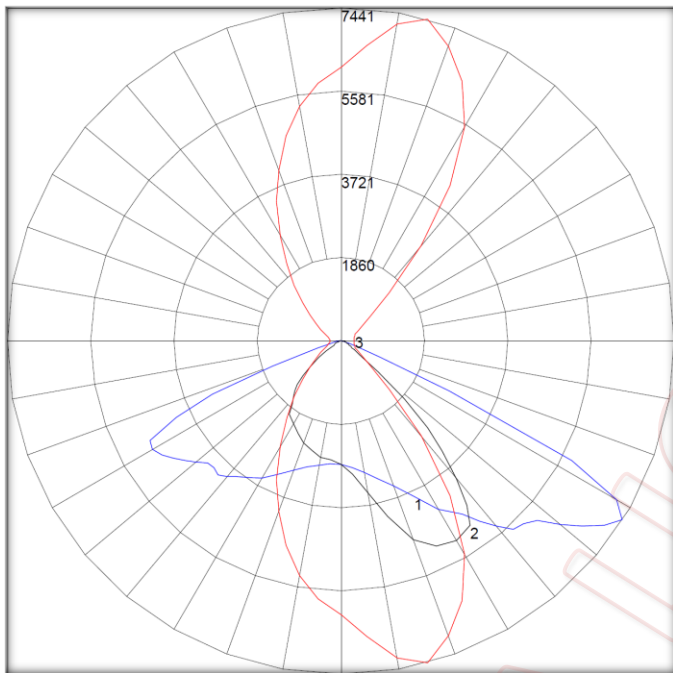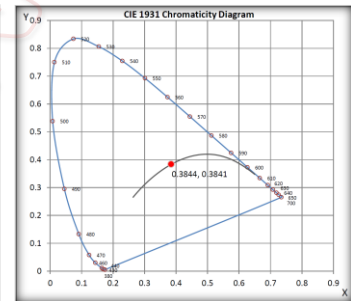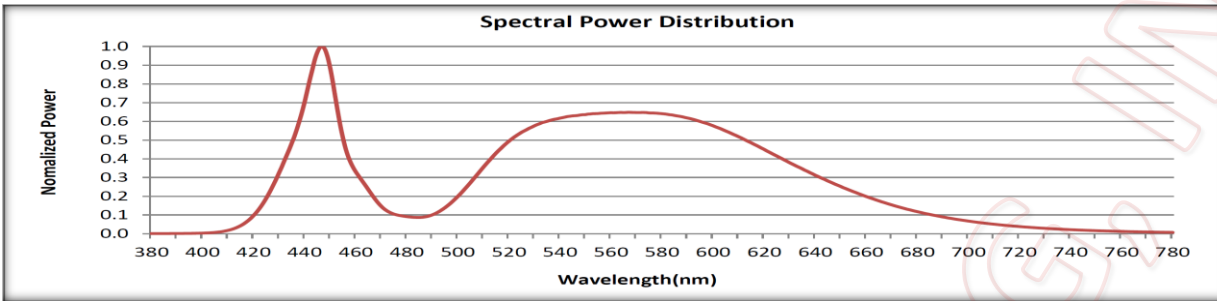

Size / Dimensions
 (Length) 21¼" (54 CM)
 (Width) 11" (28 CM)
 (Height) 5¼" (13 CM) w/out NEMA Socket
 (Height) 6" (15 CM) with NEMA Socket

Model	Product	Power	Equivalent
SBL-150W-50K-277V	LED Shoebox Luminaire 150W 5000K 277V	150W	750W MH/HPS
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	150W P.F. ≈ 0.88	150 Lumens per Watt	22,500 Lumens
Color Rendering	Color Temperature	Beam Angle	Life
CRI 70.3	50K ÷ CCT 5000K ±10%	150°x75°	5-Years / 50,000 Hrs (L ₇₀ B ₅₀) T _[A] 25°C Max.